



WE LIFT YOU UP.

Manufacturer of platform lifts for
passenger and goods.


Nami Lift with office and production unit
in Tollarp, Sweden is one of the leading
suppliers of quality lifts in western Europe.

We develop and manufacture platform
lifts for indoor and outdoor use.

Our advanced preassembly system
render simple installation possible.

Please contact us for quotation!

In principle the lift can be custom
built according to your specific
requirements!

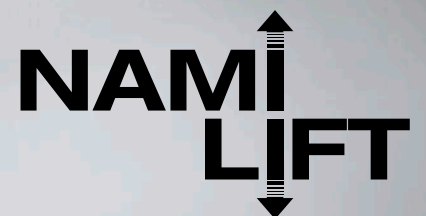

Products

Platform lifts for all needs. For indoor and outdoor use.

PL400

PL401

MSW B-HISS

Platform lifts for passenger and goods traffic. Our models suit all settings and has a lifting capacity of 400 kg.

- Homes
- Schools
- Day nurseries
- Offices
- Shops
- Restaurants
- Hotels
- Etc.



A401
PL401



MSW
B-lift



PL400



PL401

GL800

GL1000

GL2000

Powerful allround lifts suitable in all settings that demands heavy lifting. Capacity 800, 1000 and 2000 kg

- Industries
- Workshops
- Shops
- Restaurants
- Pubs
- Hospitals
- Hotels
- Etc.



GL2000



GL800
GL1000

Lifts for passenger traffic

Technical data:

STANDARD EQUIPMENT	PL400	PL401	MSW B-LIFT
Drive system	Screw-driven with frequency control	Beltdrive with electrical control	Screw-driven
Lifting capacity	400 kg	400 kg	300 kg
Lifting height	0-13 m	0-13 m	0-3 m
Electrical connection	1-phase 240V 16A	1-phase 240V 16A	3-phase 400V 16A
Platform	1100x1500 mm (can be custom built)	1100x1500 mm (can be custom built)	910x1400 mm
Shaft	width +300, length +100 mm	width +200, length +100 mm	1260x1500 mm
Pit	50 mm	50 mm	60 mm
Doors	A1 with electrical lock	A1 with electrical lock	Gates with electrical lock
Colour	Filmlaminated, galvanized steel sheet	Filmlaminated, galvanized steel sheet	Laquered grey and galvanized sheet

Lifts for passenger and goods traffic

Technical data:

STANDARD EQUIPMENT	GL800	GL1000	GL2000
Drive system	Screw-driven with frequency control	Screw-driven with frequency control	Screw-driven with frequency control
Lifting capacity	800 kg	1000 kg	2000 kg
Lifting height	0-13 m	0-13 m	0-13 m
Electrical connection	3-phase 400V 20A	3-phase 400V 20A	3-phase 400V 32A
Platform	1100x1500 mm 1100x1700 mm 1200x2100 mm 1500x2500 mm (can be custom built)	1100x1500 mm 1100x1700 mm 1200x2100 mm 1500x2500 mm (can be custom built)	1500x2000 mm 2000x2000 mm (can be custom built)
Shaft	width +400, length +100 mm	width +400, length+100 mm	width +400, length +100 mm
Pit or ramp	70-100 mm	70-100 mm	70-120 mm
Doors	A1 or double door with electrical lock	A1 or double door with electrical lock	A1 or double door with electrical lock
Colour	Filmlaminated, galvanized steel sheet	Filmlaminated, galvanized steel sheet	Filmlaminated, galvanized steel sheet



Options

Shaft panels in safety glass
Fire-proof doors
Automatic door opener
Key control

School control
UPS backup
Remote controlled infra link

Other colour
Stainless steel
Other platform size



Gate




A2:1 door



A2 door



A3 door

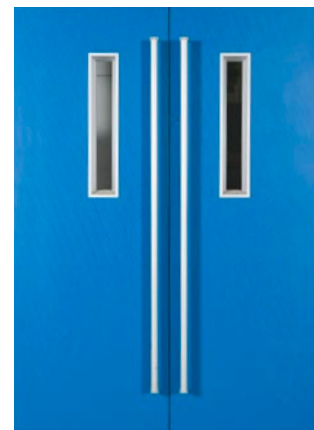

Double door

STANDARD PANEL



OPTIONAL PANEL

Glossy laquered in optional colour



Retailer:

